

SD MAGNETMATERJAL


PRO MAGNETIC 0,85 mm

SD PRO MAGNETIC 10 1,02 X 10 m 0,85 mm (SDMF08510102)

FEATURES AND ADVANTAGES:

- Matte white PVC bonded to magnet sheeting, is compatible for UV curable printing.
- Magnet sheeting is attracted to iron, easy to apply, remove and change, without leaving any residue.
- Without demagnetized, anti-rust

CONSTRUCTION DRAWING:

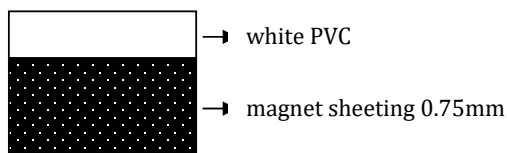

CUSTOMIZED SIZE:


30M/15M×610/620×0.85mm total thickness
10/15M×1000/1020×0.85mm total thickness

Size can be customized as require

PACKAGING:



3" core



lid-tray box

PRINTING INDEX

- compatible
Δ testing required
× not compatible

(ECO) SOLVENT	UV CURABLE	LATEX	DYE/PIGMENT	OFFSET/FLEXO	SCREEN PRINT	TONER BASED
Δ	○	×	×	Δ	○	×

MAGNETIC DATA:

Pull Strength: ≥ 38 g/cm²

PHYSICAL DATA:

Total thickness	0.85mm (± 0.08)
Weight	2900g/M ²
Opacity	100%
Water resistance	High

PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed, and used up within one month.