




papergraphics

THE LARGE-FORMAT PRINT SPECIALIST

S/FVM | Stickyprints R10 anti-slip monomeric self-adhesive floor vinyl 150mic

Product Code: S/FVM

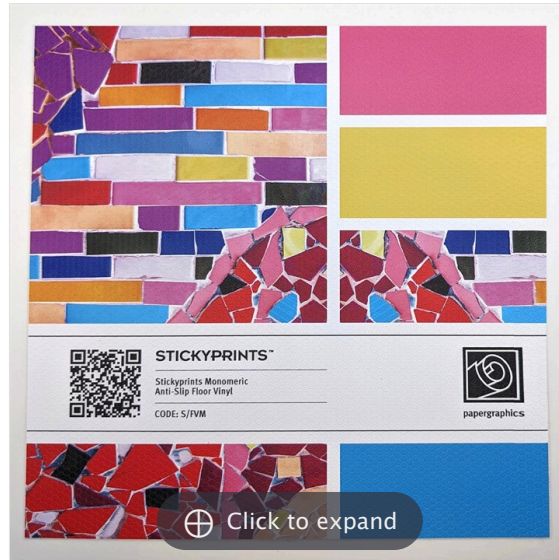

Available options

- S/FVM | Stickyprints R10 anti-slip monomeric self-adhesive floor vinyl 150mic - 1372mm x 5m (1 Roll Box)
- S/FVM | Stickyprints R10 anti-slip monomeric self-adhesive floor vinyl 150mic - 1372mm x 25m (1 Roll Box)
- S/FVM | Stickyprints R10 anti-slip monomeric self-adhesive floor vinyl 150mic - 1372mm x 30m (1 Roll Box)

Choose this highly versatile, all-in-one, anti-slip, printable floor vinyl to transform interior floor spaces with ease. This monomeric self-adhesive floor vinyl boasts a premium surface texture that achieves an R10 slip rating even when printed and is tough enough for all of your short-to-medium term floor graphic requirements without the need to over-laminate. Just print and cut to create stunning floor graphics with the added benefit of an in-built anti-slip finish perfect for commercial and retail indoor environments, exhibitions, airports, schools and public spaces.

Choose this product when you need an excellent self-adhesive, anti-slip floor vinyl for short-to-medium term interior floor graphics without the need for over lamination. Ideal for wayfinding, messaging and advertising in commercial and retail spaces, exhibitions, airports, schools and public spaces.

Product Features

- Tough, micro-patterned anti-slip vinyl

•	A hexagonal surface texture that achieves an R10 even when printed
•	Suitable for indoor, short-to-medium term applications
•	Also works well on short-pile carpets
•	Semi-permanent self-adhesive
•	Easily cut by hand or machine to the required shape
•	No lamination required

Product Properties	
Brand	PG Stickyprints
Colour	N/A
Media thickness (micron)	150
Media finish	Textured
Core diameter	76MM
Adhesive Type	Semi-Permanent
Life Span	Upto 4 Years
Construction	Self-adhesive monomeric soft-PVC
Adhesive	Water-based semi-perm clear
Release liner	135gsm clay coated siliconised Kraft paper
Dimensional stability MD	Finat 14 <1%
Dimensional stability CD	Finat 14 <1%
Adhesive strength MD	N/25mm Finat 1 9+/-5
Finish	Super hexagon

Ink Technology Compatibility	
Use with Aqueous Dye inks:	Not Recommended
Use with Aqueous Pigmented inks:	Not Recommended
Use with Oil Pigmented inks:	Not Recommended
Use with Laser toner:	Not Recommended
Use with Latex inks:	Recommended
Use with Solvent inks:	Recommended
Use with Eco-Solvent inks:	Recommended
Use with UV Curable inks:	Recommended
Use with Dye-Sublimation inks:	Not Recommended

Product Certifications	
•	Slip rating - DIN 51130 - R10
•	Slip rating - BS 7976-2: 2002 Pendulum Test

Usage Guidance	
•	This product has been designed for short term interior floor graphics with an anti-slip finish without the need for over-lamination.
•	Fire behaviour - Self extinguishing, adhered to stainless steel
•	Recommended application temperature >10c